


Dot Graphic VFD Module

GU128x32D-7000

- ❑ 128x32 Dot Graphic
- ❑ Single 5V Supply
- ❑ High Brightness Blue Green Display
- ❑ Operating Temp -40°C to +85°C
- ❑ 11 Multi Sized Fonts
- ❑ High Speed 8 Bit Parallel Interface
- ❑ Asynchronous RS232 Serial Interface

The module includes the Vacuum Fluorescent Display glass, VF drivers and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V TTL/CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 115,200 with none parity. The module is ready to receive ASCII characters without initialization commands.

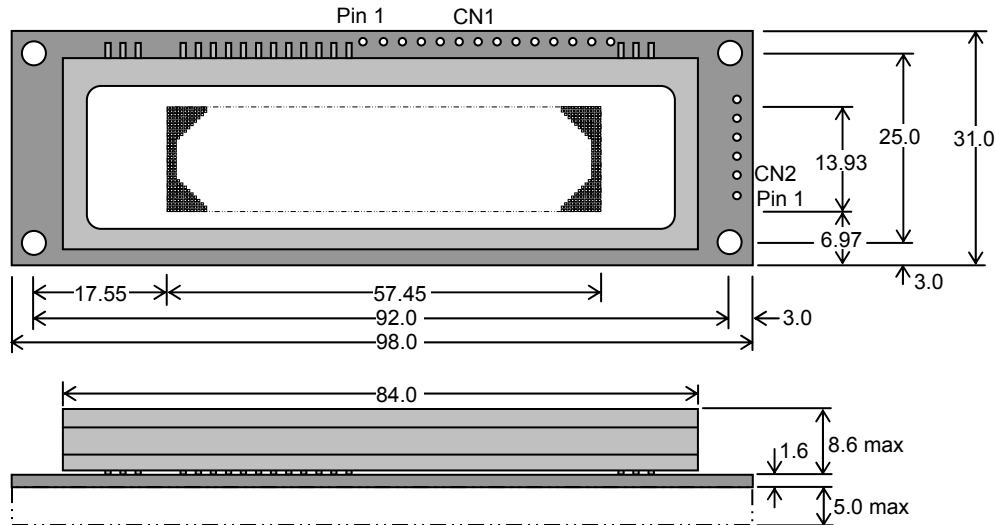

Dimensions in mm & subject to tolerances.
Mounting holes 3.2mm dia.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	VCC	5.0VDC +/- 5%	GND=0V
Power Supply Current	ICC	300mADC typ.	VCC=5V
RS232 SIN High Input	VIH	3.0VDC min. 15VDC max.	VCC=5V
RS232 SIN Low Input	VIL	-15VDC min 0.5VDC max.	VCC=5V
SBUSY High Output	VOH	4.0VDC min. Vcc max.	VCC=5V
SBUSY Low Output	VOL	0VDC min 0.5VDC max.	VCC=5V
Logic High Input	VIH	0.8VDC min. Vcc max.	VCC=5V
Logic Low Input	VIL	0VDC min 0.2VDC max.	VCC=5V
Logic High Output	VOH	3.8VDC min. Vcc max.	IOH=-1.5mA
Logic Low Output	VOL	0VDC min 0.6VDC max.	IOL =1.6mA

The power on rise time should be less than 100ms. Inrush current at power on can be 2 x ICC.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Display Area (XxY mm)	57.45 x 13.93
Dot Size/Pitch (XxY mm)	0.30 x 0.28 / 0.45 x 0.44
Luminance	700 cd/m ² Typ.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

SOFTWARE COMMANDS – Popular codes, more included

Command	Code
Write Character to Display	20H-FFH
BS, HT, LF, CR, Display Clear	08H, 09H, 0AH, 0DH, 0CH
Initialize Display	1BH 40H
Specify International Font	1BH 52H n
Vertical Scroll Mode	1FH 02H
Horizontal Scroll Mode	1FH 03H
Cursor Set	1FH 24H xL xH yL yH
Scroll Display Action	1FH 28H 61H 10H wL wH cL cH s
Display Blank	1FH 28H 61H 11H p t1 t2 c
Screen Saver	1FH 28H 61H 40H p
Bit Image Display Group	1FH 28H 66H 11H xL xH
Font Magnified Display	1FH 28H 67H 40H x y
Brightness Level Setting	1FH 58H n

The module defaults to 5x7 font, cursor top left at power on.

COMMON FONT

	00	10	20	30	40	50	60	70
00				0	P	'	F	
01			1	A	O	a	a	
02			2	B	R	b	r	
03			#	3	C	S	s	e
04			\$	4	D	T	t	d
05			%	5	E	V	e	u
06			&	6	F	U	u	v
07			*	7	G	W	w	
08			<	8	H	K	h	k
09			>	9	I	V	i	v
0A			*	:	J	Z	j	z
0B			+	:	K	L	k	l
0C			.	<	L	N	l	n
0D			-	=	M	O	m	o
0E			#	>	N	O	n	o
0F			/	?	0	.	o	

INTERNATIONAL FONTS (n=0)

	80	90	A0	B0	C0	D0	E0	F0
00	0	P	'	F				
01	1	A	O	a	a			
02	2	B	R	b	r			
03	#	3	C	S	s	e		
04	\$	4	D	T	t	d		
05	%	5	E	V	e	u		
06	&	6	F	U	u	v		
07	*	7	G	W	w			
08	<	8	H	K	h	k		
09	>	9	I	V	i	v		
0A	*	:	J	Z	j	z		
0B	+	:	K	L	k	l		
0C	.	<	L	N	l	n		
0D	-	=	M	O	m	o		
0E	#	>	N	O	n	o		
0F	/	?	0	.	o			

PARALLEL INTERFACE – CN1

Pin	Sig	Pin	Sig
1	GND	8	D1
2	VCC	9	D2
3	NC*	10	D3
4	RS	11	D4
5	/WR	12	D5
6	/RD	13	D6
7	D0	14	D7(PBUSY)

SERIAL INTERFACE – CN2

Pin	Async. Sig	Description
1	VCC (5V)	Power Supply I/P
2	SIN	RS232 Data Input
3	GND	GND
4	SBUSY	Busy Output
5	NC	-
6	/RESET	Reset Input

*Pin 3 can be changed to /RESET or PBUSY terminal by selection of Jumper JRB. RS is not used. Full specification available on request.

CONTACT

Noritake Sales Office Tel Nos
 Nagoya Japan: +81 (0)52-561-9867
 Canada: +1-416-291-2946
 Chicago USA: +1-847-439-9020
 Munchen (D): +49 (0)89-3214-290
 Itron UK: +44 (0)1493 601144
 Rest Europe: +49 (0)61-0520-9220
www.noritake-iron.com

Subject to change without notice.
IUK Doc Ref:12770 Iss:1 11Aug05